

**CITY OF BUCYRUS, OHIO
EVENT/ASSEMBLAGE PERMIT**

Date Today _____ Date of event requested _____

Organization or Sponsor _____

Reason for Event or Assemblage _____

Applicant's/Contact Name _____ Phone _____

Applicant's/Contact Address _____

E-mail _____ Fax _____

Time of Event Start _____ End _____

Assemble Areas _____

Location/Route of Event in Detail (attach additional sheet if needed) _____

Street Department equipment needed _____

Police Department services needed _____

Other services _____

THERE IS ABSOLUTELY NO PAINTING OR MARKING OF THE STREETS OR SIDEWALKS PERMITTED – THIS INCLUDES IN THE PARKS - SIDEWALK CHALK OR DUCT TAPE IS ACCEPTABLE. ALL SIGNAGE IS TO BE PROMPTLY REMOVED BY APPLICANTS.

SIGNATURE of Applicant/Title _____

#####

Date of Approval _____ Police Department _____

Safety/Service Director _____

THIS COMPLETED FORM CAN BE FAXED TO (419) 562-4013 **OR** MAILED TO 500 S. SANDUSKY AVENUE, BUCYRUS, OHIO 44820 **OR** E-MAILED TO admin@cityofbucyrusoh.us
QUESTIONS CALL (419) 562-6767 Ext. 221 – THERE IS NO CHARGE FOR THIS PERMIT.
YOU WILL RECEIVE A SIGNED FORM UPON APPROVAL.

REQUEST FOR DEPOSIT REFUND

TODAY'S DATE _____

NAME OF DEPOSITOR _____

ADDRESS _____

PHONE NUMBER _____

DATE OF DEPOSIT _____

DEPOSIT AMOUNT _____

DEPOSIT RECEIPT NUMBER _____

TYPE OF DEPOSIT _____
(DEMO, STREET-EXCAVATION, etc.)

PERMIT NUMBER _____

The above referenced request for deposit refund meets the requirements of the Codified Ordinances of the City of Bucyrus. This document shall serve as notice to the City Auditor to refund \$_____ of said deposit. A portion of the deposit consisting of \$_____ shall be retained until the conditions listed below are completed to the approval of the Service-Safety Director for the City of Bucyrus or designee.

APPROVED **APPROVED WITH CONDITIONS**

Activity needing further completion:

SIGNATURE OF APPROVAL - TITLE

General Notes:

The Contractor shall contact the following departments prior to commencing any work:

- The Ohio Utilities Protection Service 800-362-2764
- The Bucyrus City Police Department 419-562-1006
- The Bucyrus City Fire Department 419-562-1351
- Life Star Ambulance Service 419-562-6660
- The Bucyrus City Water Department 419-562-6767
- The Bucyrus City Street Department 419-562-2771
- The Bucyrus City Engineering Department 419-562-6767 ext. 226

Traffic control devices shall be used to provide adequate protection for pedestrian and vehicular traffic in accordance with the Ohio Department of Transportation Manual of Traffic Control for Construction and Maintenance Operation. And O.D.O.T. Item 614-Maintaining Traffic.

The contractor shall maintain at least one lane of traffic unless otherwise permitted by the City.

Pavement replacement Class "C" Concrete (O.D.O.T. Item – 499) shall be protected from all loading for 7 days per O.D.O.T. Item – 451.14 unless otherwise directed by the City Engineering Department.

Concrete shall not be placed on a frozen base or when air temperature is below 35 degrees Fahrenheit.

Concrete shall be protected from freezing temperatures per O.D.O.T. Item – 451.06

"Hot Mix" asphalt shall be placed in accordance with O.D.O.T. Item – 401. A minimum surface temperature of 36 degrees Fahrenheit and a minimum material temperature of 312 degrees Fahrenheit shall be maintained.


Joints between old and new pavements shall be sealed with hot applied crack and joint sealer per O.D.O.T Item – 705.04

Open excavations shall be maintained with a metal plate or backfilled completely to maintain vehicular traffic.

During winter months or when "hot mix" asphalt is not available, 3 inches of "cold mix" asphalt or concrete shall be placed in street excavation. The contractor shall must remove "cold mix" asphalt or concrete and replace pavement as shown on Pavement Repair Detail prior to street or alley excavation deposit being refunded.



NOTE: THIS DETAIL SHALL APPLY TO SANITARY LATERALS INSTALLED IN CITY RIGHTS-OF-WAY

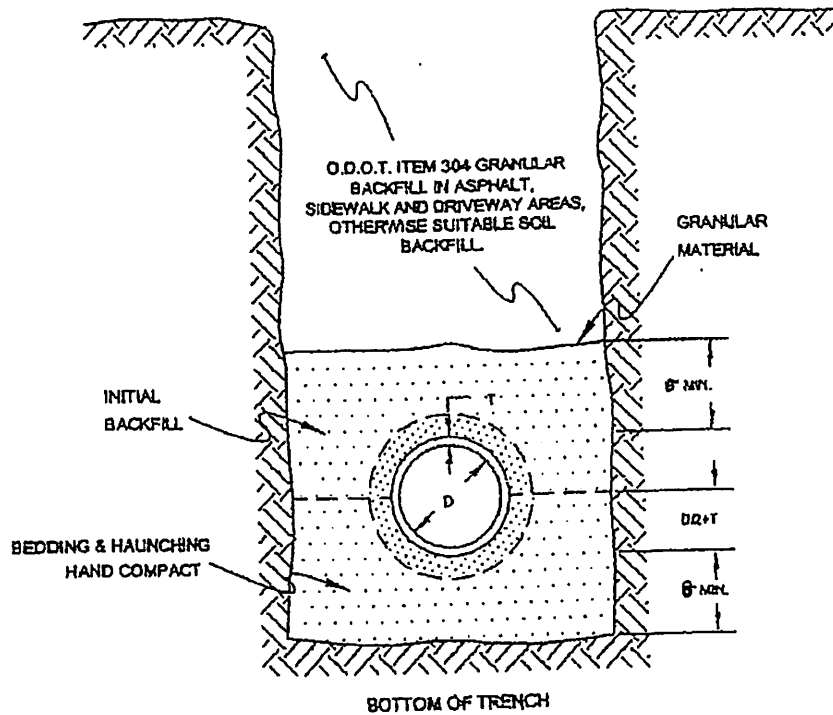

NOTE:

GRANULAR MATERIAL USED FOR BEDDING, HAUNCHING AND INITIAL BACKFILL SHALL CONFORM TO A.S.T.M. NO. 57, CRUSHED AGGREGATE:


MAXIMUM TRENCH WIDTH AT TOP OF PIPE SHALL BE AS FOLLOWS.
FOR PIPE 24" ID OR LESS MAXIMUM TRENCH = O.D. OF PIPE + 24"
FOR PIPE GREATER THAN 24" ID MAXIMUM TRENCH = O.D. OF PIPE + 30"

BEDDING FOR SANITARY LATERALS

ENGINEERING DEPT.
CITY OF BUCYRUS

STANDARD
DWG. NO.
SAN-21

Appendix "A" pg 3

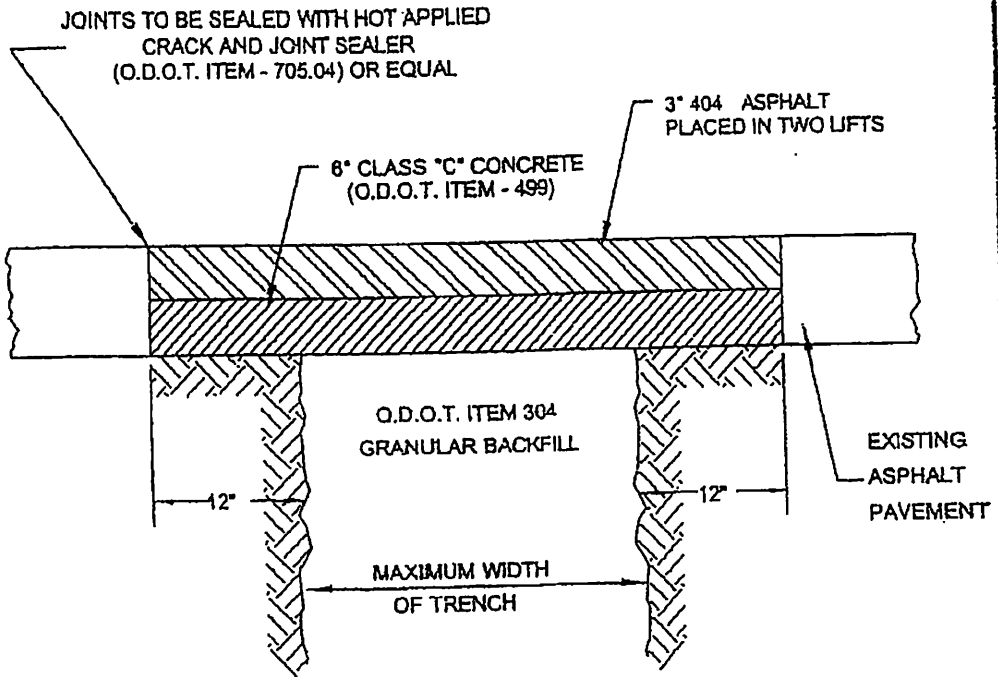

PAVEMENT REPAIR

Appendix "A" pg 4


ENGINEERING DEPT.
CITY OF BUCYRUS

STANDARD
DWG. NO.
PR-2

CITY OF BUCYRUS SANITARY SEWER DETAIL

GENERAL NOTES:

1. TRENCH SHALL BE LEFT OPEN UNTIL INSPECTION IS COMPLETE.
2. ALL PIPE AND FITTINGS SHALL BE SDR 35 OR 26.
3. ALL PIPE SHALL BE OF SAME DIAMETER WITH 6" OF # 57 STONE AROUND PIPE.
4. NO 90° BENDS ARE ALLOWED IN THE LATERAL FROM THE MAIN TO THE CLEAN-OUT STACK.
5. ALL TAPS SHALL BE INSPECTED BY THE CITY OF BUCYRUS PERSONNEL.
6. PIPING BEHIND CLEANOUT TO BE INSTALLED PER BOCA CODE.
7. MINIMUM LATERAL SIZE:
 4" SERVICE OUTSIDE RIGHT-OF-WAY
 6" SERVICE WITHIN THE RIGHT-OF-WAY
8. PROPERTY OWNER RESPONSIBLE FOR INSTALLING CLEANOUT WHEN MAINTENANCE OCCURS, IN ACCORDANCE WITH THIS STANDARD.
9. SEWER TAPPER IS TO COMPLETE THE ATTACHED TAP LOCATION SHEET.
10. SEWER LINE SHALL BE LAID ON GRADE BETWEEN 1% AND 7% SLOPE.
11. ONLY LATERALS THAT HAVE BEEN REPLACED TO THE MAIN WITH PVC PIPE AND THE REQUIRED CLEANOUT INSTALLED IN THE RIGHT-OF-WAY WILL BE ACCEPTED BY THE CITY FOR MAINTENANCE.

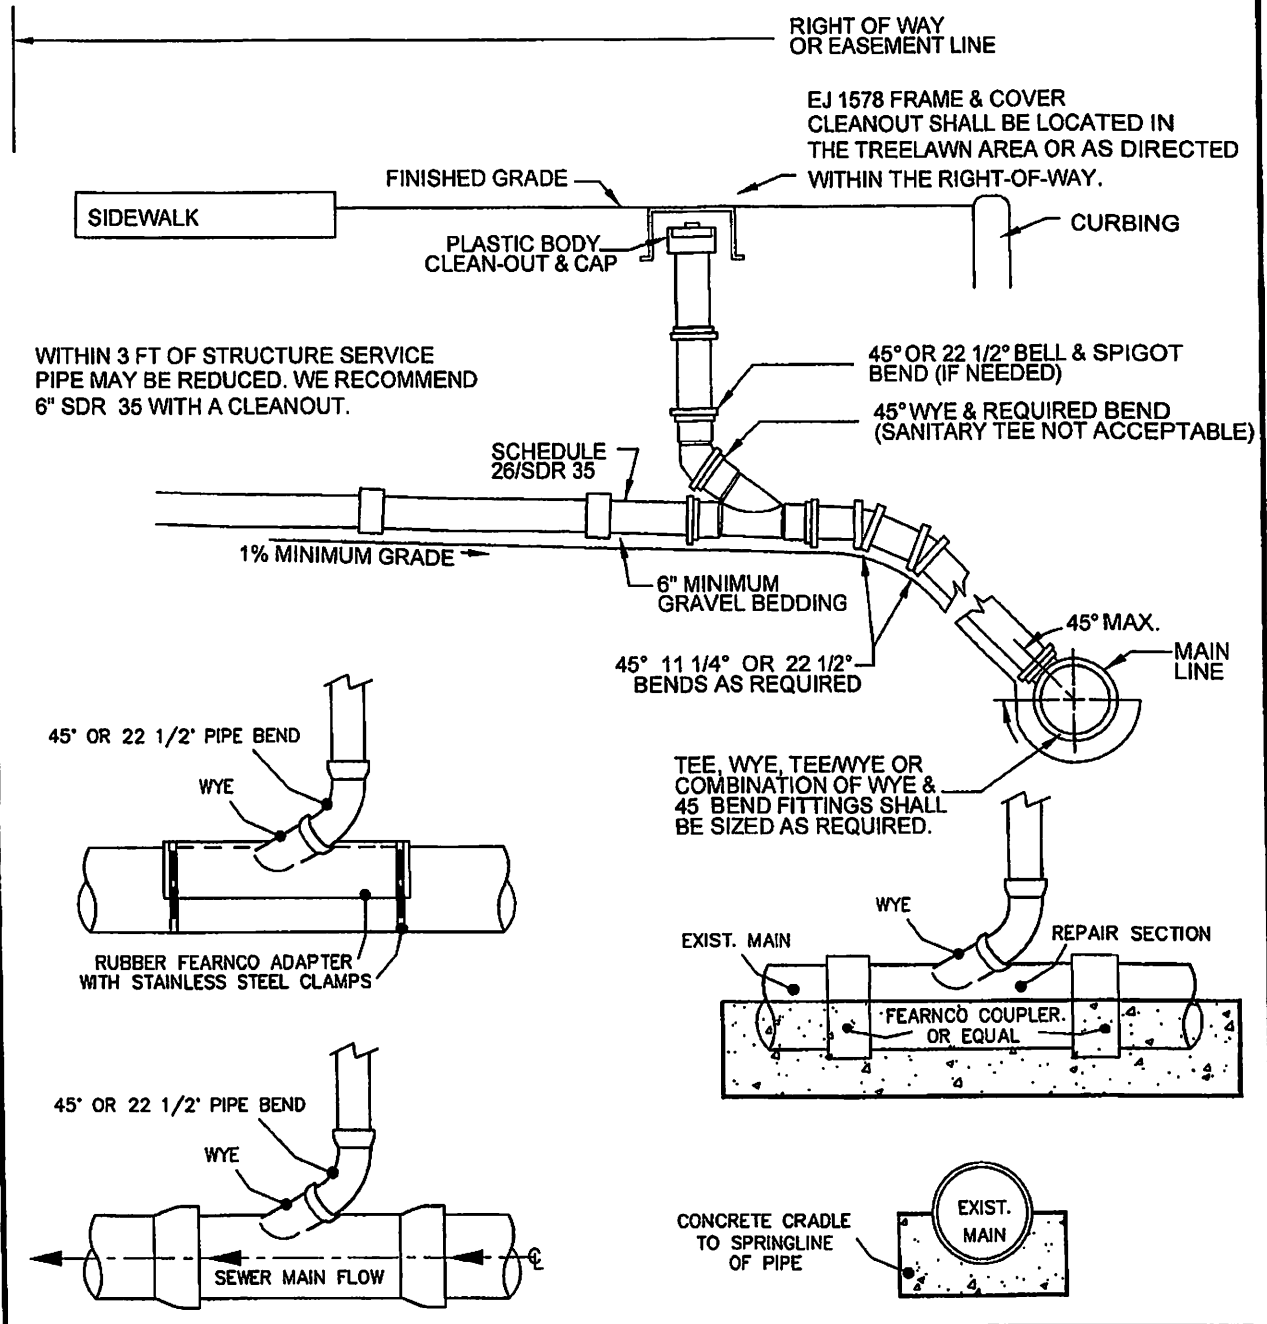

**CITY OF BUCYRUS
SEWER CONNECTIONS**

DATE: _____

NAME: _____

ADDRESS: _____

DATE OF SEWER CONNECTION: _____

VERIFIED BY: _____

Copy to:
Service-Safety Director
Water Distribution Office